


DECESPUGLIATRICE IDRAULICA

LS8 REV

HYDRAULIC HEDGE TRIMMER

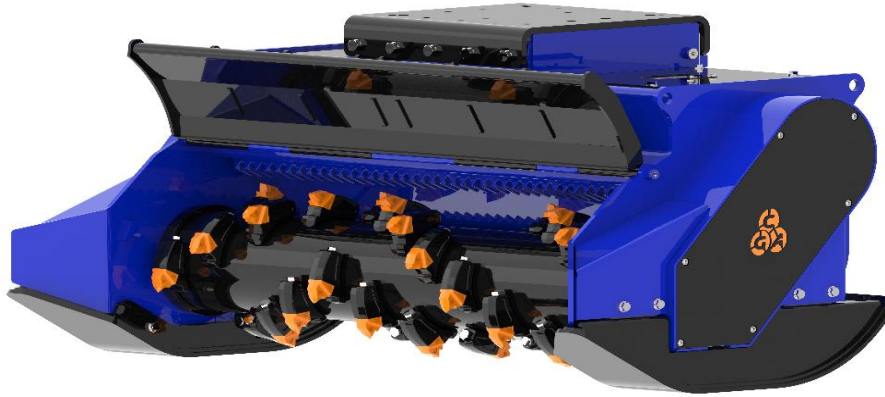

LISTINO PREZZI – PRICELIST

Modello - Model				Cilindrata Displacement	Bar min/max	Oil L/min				
LS8 1200 REV	15,0 – 30,0	1300	1050	45-60-80	200-350	100-130-180	1x55mm	170-100-90		
LS8 1600 REV	18,0 – 30,0	1600	1185	45-60-80	200-350	100-130-180	1x55mm	220-100-90		
LS8 1800 REV	20,0 – 30,0	1800	1320	45-60-80	200-350	100-130-180	1x55mm	220-100-90		
	Motore a pistoni portata fissa				Motore a pistoni portata variabile.					
		HF 14				HF 14				
	Piston motor with fixed flow				Piston motor, variable displacement					
LS8 1200 REV	MPF	DF	36	PREZZO	€ 24.311,20	MPV	DF	36	PREZZO	€ 26.953,84
LS8 1600 REV	MPF	DF	42	SENZA	€ 26.594,57	MPV	DF	42	SENZA	€ 29.237,21
LS8 1800 REV	MPF	DF	54	SELLA	€ 28.810,78	MPV	DF	54	SELLA	€ 31.453,42

ACCESSORI – ACCESSORIES

Kit elettrovalvola per azionamento cofano frontale € 600,60 Diverter valve, to active frontal hood	15 – 17 Ton € 1.189,19		18 – 30 Ton € 1.441
	15 – 17 Ton		18 – 30 Ton

UTENSILI – TOOLS


HF14	KIT	€ 82,45	
1 TE050	1	€ 11,19	
2 TE046	1	€ 71,25	








DECESPUGLIATRICE IDRAULICA

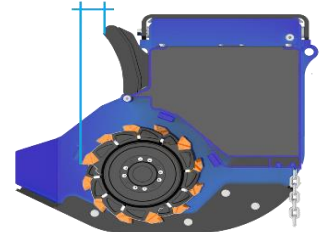LS8 REV

HYDRAULIC HEDGE TRIMMER



Modello - Model				Cilindrata Displacement	Bar min/max	Oil L/min		
LS8 1200 REV	15,0 – 30,0	1300	1050	45-60-80	200-350	100-130-180	1x55mm	170-100-90
LS8 1600 REV	18,0 – 30,0	1600	1185	45-60-80	200-350	100-130-180	1x55mm	220-100-90
LS8 1800 REV	20,0 – 30,0	1800	1320	45-60-80	200-350	100-130-180	1x55mm	220-100-90

CARATTERISTICHE TECNICHE E DOTAZIONI STANDARD

- Trasmissione monocinghia dentata preallungata HTD ad alte prestazioni.
- Cofanatura interna a doppia cassa con intercapedine.
- Protezione carter cinghie.
- Cofano frontale idraulico, per una maggiore capacità di taglio.
- Supporti rotore interni con labirinto per la protezione dei cuscinetti dalle impurità.
- Cuscinetti rotore orientabili di prima qualità.
- Blocco valvole comprensivo di valvola prioritaria per regolazione della portata olio, antiurto (valvola di max pressione), anticavitazione.
- Motore a pistoni.
- Protezioni antinfortunistiche con catene a norma CE.

TECHNICAL FEATURES AND STANDARD EQUIPMENT

- Toothed high-performance belts transmission.
- Internally reinforced with inside double-case body with interspace.
- Protective belts-cover.
- Hydraulic hoods , fully openable for higher cutting capacity.
- Inside Rotor Supports with "labyrinth" for the protection of the bearings by the impurities.
- Adjustable bearings of 1st quality.
- Valves block complete with priority valve for adjusting oil flow, anti-shock valve (pressure relief valve), anti-cavitation.
- Cast iron gear motor.
- Accident prevention chains protections according to EC directives.

Rotore forestale a denti fissi



Forestal rotor fixed teeth

ACCESSORI

-Attacco sella a perni

ACCESSORIES

-Mounting hitch & pins

