


DECESPUGLIATRICE IDRAULICA

LS FS5

HYDRAULIC HEDGE TRIMMER

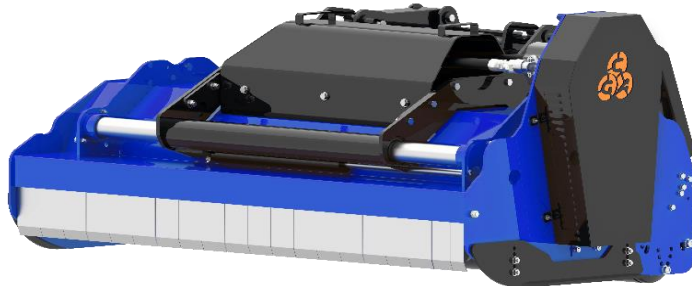

LISTINO PREZZI – PRICELIST

Modello - Model	HP			Cilindrata Displacement	Bar min/max	Oil L/min		
LS FS5 1600	50-90	1600	890	27-34-44-51	200-220	60-70-90-100	4	182-120-110
LS FS5 1800	50-90	1800	930	27-34-44-51	200-220	60-70-90-100	4	202-120-110
LS FS5 2000	50-90	2000	970	27-34-44-51	200-220	60-70-90-100	4	222-120-110

	KF 3			HF16			
	C	36+18		M	18		
LS FS5 1600	C	36+18	10.879,60 €	M	18		10.984,60 €
LS FS5 1800	C	40+20	11.685,49 €	M	20		11.790,49 €
LS FS5 2000	C	44+22	12.491,39 €	M	22	12.596,39 €	

ACCESSORI – ACCESSORIES

<p>Traslazione idraulica</p> <p>900,90 €</p> <p>Hydraulic side shift</p> <p>Kit elettrovalvola per azionamento spostamento idraulico</p> <p>600,60 €</p> <p>Diverter valve, to operate the hydraulic side shift</p>		<p>Attacco pale articolate, terne, telescopici.</p> <p>819,00 €</p> <p>Hitch coupler for articulated backhoe-loader, backhoe loader, telescopic.</p>
		<p>Motore pistoni</p> <p>Sovrapprezzo 2.402,40 € Extra charge 2.402,40 €</p> <p>Ricambio 2.882,88 € Spare part 2.882,88 €</p> <p>Piston motor</p>

UTENSILI – TOOLS


KF3					HF16				
		KIT	€ 39,59				KIT	€ 39,45	
1	UNI 5738-03	1	€ 4,64	1	UNI 5738-03	1	€ 4,64		
2	UNI 6592-05	1	€ 0,27	2	UNI 7473-03	1	€ 1,91		
3	UNI 7473-03	1	€ 1,91	3	TE059	1	€ 32,90		
4	141085	2	€ 6,01						
5	TE041	2	€ 5,32						
6	TE042	1	€ 5,19						







DECEPUGLIATRICE IDRAULICA

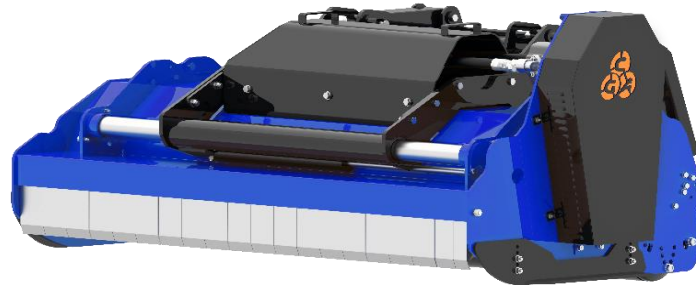LS FS5

HYDRAULIC HEDGE TRIMMER



Modello - Model	HP			Cilindrata Displacement	Bar min/max	Oil L/min		
LS FS5 1600	50-90	1600	890	27-34-44-51	200-220	60-70-90-100	4	182-120-110
LS FS5 1800	50-90	1800	930	27-34-44-51	200-220	60-70-90-100	4	202-120-110
LS FS5 2000	50-90	2000	970	27-34-44-51	200-220	60-70-90-100	4	222-120-110

CARATTERISTICHE TECNICHE E DOTAZIONI STANDARD

- Attacco oscillante ed autolivellante universale.
- Rotore elicoidale con mazze bonificate e coltelli intercambiabili.
- Spostamento laterale meccanico.
- Trasmissione a cinghie trapezoidali dentate ad alte prestazioni.
- Cofanatura interna a doppia cassa con intercapedine.
- Protezione carter cinghie.
- Supporti rotore interni con labirinto per la protezione dei cuscinetti dalle impurità.
- Cuscinetti rotore di prima qualità.
- Blocco valvole comprensivo di valvola prioritaria per regolazione della portata olio, antiurto (valvola di max pressione), anti-cavitazione.
- Motore ad ingranaggi in ghisa.
- Protezioni antinfortunistiche a norma CE.

TECHNICAL FEATURES AND STANDARD EQUIPMENT

- Floating self levelling universal hitch.
- *WZ* Helicoidal rotor with hammers austempered and cutting blades interchangeable.
- Mechanical side shift.
- Toothed high-performance V-belts transmission.
- Internally reinforced with inside double-case body with interspace.
- Protective belts-cover.
- Inside Rotor Supports with "labyrinth" for the protection of the bearings by the impurities.
- Bearings of 1st quality.
- Valves block complete with priority valve for adjusting oil flow, anti-shock valve (pressure relief valve), anti-cavitation.
- Cast iron gear motor.
- Accident prevention protections according to EC directives.

Rotore elicoidale



Helicoidal Rotor



ACCESSORI

- Traslazione idraulica.
- Kit elettrovalvola per azionamento spostamento idraulico
- Motore pistoni consigliato con impianto high-flow
- Attacco pale articolate, terne, telescopici.

ACCESSORIES

- Hydraulic side shift.
- Diverter valve, to operate the hydraulic side shift
- Piston motor.
- Hitch coupler for articulated backhoe-loader, backhoe loader, telescopic.

